

Christmas Tree Case Study: Computed Tomography as a Tool for Mastering Complex Real World Objects with Applications in Computer Graphics

Armin Kanitsar* Thomas Theußl* Lukas Mroz† Miloš Šrámek¶¹ Anna Vilanova Bartroň*
Balázs Csébfalvi* Jiří Hladůvka* Stefan Guthe|| Michael Knapp* Rainer Wegenkittl† Petr Felkel‡
Dominik Fleischmann§ Werner Purgathofer* Meister Eduard Gröller*

*Institute of Computer Graphics and Algorithms
Vienna University of Technology

†Tiani Medgraph
Austria

‡VRVis Research Center
Vienna, Austria

§Department of Radiology
University of Vienna

¶Austrian Academy of Sciences
Vienna, Austria

||WSI/GRIS
University of Tübingen

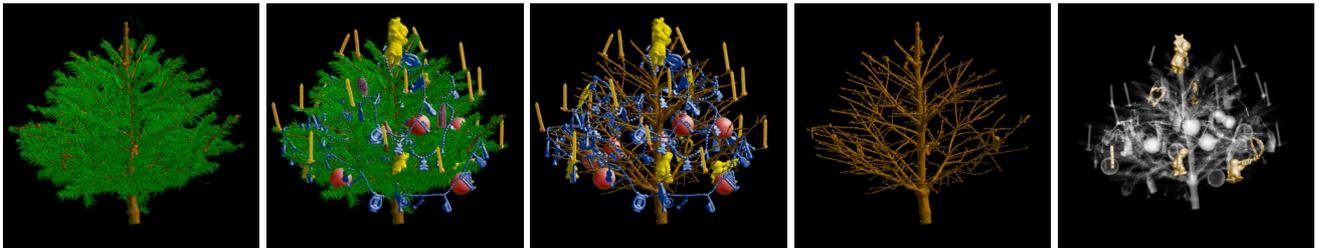


Figure 1: A short story: Before Christmas – the 25th – left for holidays – the sad end – Christmas tree in heaven.

Abstract

We report on using computed tomography (CT) as a model acquisition tool for complex objects in computer graphics. Unlike other modeling and scanning techniques the complexity of the object is irrelevant in CT, which naturally enables to model objects with, for example, concavities, holes, twists or fine surface details. Once the data is scanned, one can apply post-processing techniques aimed at its further enhancement, modification or presentation. For demonstration purposes we chose to scan a Christmas tree which exhibits high complexity which is difficult or even impossible to handle with other techniques. However, care has to be taken to achieve good scanning results with CT. Further, we illustrate the post-processing by means of data segmentation and photorealistic as well as non-photorealistic surface and volume rendering techniques.

CR Categories: I.3.3 [Computing Methodologies]: Computer Graphics—Picture/Image Generation I.6.5 [Computing Methodologies]: Simulation and Modeling—Model Development

Keywords: modeling, computed tomography, volume visualization

*{kanitsar,theussl,anna,balazs,jiri,knapp,meister}@cg.tuwien.ac.at,
<http://www.cg.tuwien.ac.at/home/>

†{mroz,wegenkittl}@tiani.com, <http://www.tiani.com/>

‡felkel@vrvis.at, <http://www.vrvis.at/>

§dominik.fleischmann@univie.ac.at

¶Milos.Sramek@oeaw.ac.at

||guthe@gris.uni-tuebingen.de

1 Introduction

In computer art, one is often faced with the task to digitize real world objects for the purpose of further processing with various computer graphics tools. The commonly used methods like range scanning suffer from certain limitations since they provide information only of the visible surfaces of the object. Non-convex surfaces, which are an inherent property of complex objects, often cause difficulties or even cannot be handled at all. Similar arguments hold for taking a set of photographs from different viewpoints to be used for image based rendering.

With procedural modeling of existing physical objects it is difficult to come up with an accurate description of the real world object. Furthermore it requires special effort to get a physically correct model and the more complex the model is the more difficult the modeling task becomes.

Generating data sets (i.e., modeling the objects) by scanning real world objects using CT modalities is independent of model complexity and physical correctness is automatically achieved. Different structures within the data set can be segmented and the interior can be examined as CT provides volumetric descriptions. On the other hand, CT scanners are rather expensive and not easily accessible. In this paper we describe our experiences of using CT to model a decorated Christmas tree, a very complex object with many different structures and small details.

2 Related Work

Computed tomography has been used for non-destructive investigations of trees [Habermehl and Ridder 1994]. In order to do this, mobile CTs have been built which extract single slices. This is sufficient for the detection of diseases.

State-of-the-art interactive modeling tools today are either poly-

gon or patch oriented (Maya, Truespace). However, manipulation of the underlying data structures (polygonal meshes, NURBS) is often not versatile enough to fulfill the artists demands. Therefore, in the early stages of the design often clay models are created, which are subsequently digitized by means of range scanners [Perry and Frisken 2001].

There is of course a lot of literature on laser range scanning objects. Particularly interesting for the visualization community is the work by Levoy et al. [Levoy et al. 2000], who describe their efforts to digitize large objects at high resolution with mobile laser range scanning hardware. However, for objects with a high degree of complexity this approach is not applicable.

3 Dataset Acquisition

To obtain a realistic model of a Christmas tree, we decided to use CT. For the preparation of such a data set several aspects have to be taken into account. The following section describes the generation process and preprocessing of the data set.

Model Preparation:

Firstly, special care had to be taken in the preparation of the real model to assume a high data set quality. Especially, no metal was allowed to be used, as this would result in artifacts. Therefore the sweets were unwrapped and metal hooks replaced (see Figure 2). Due to the limited diameter of the CT gantry, the size of the tree must not exceed 50 cm. Furthermore the proportions of the Christmas tree decoration and the small conifer should match those of a real Christmas tree. Therefore special items, as small candles for birthday cakes, were used.

Scanning Process:

The CT acquisition protocol had to be specifically designed as neither presets nor protocols are available for small trees. The Christmas-tree model was scanned with a Siemens Somatom Plus 4 Volume Zoom Multislice-CT scanner at the general hospital in Vienna. A tube voltage of 140kV and a tube current of 100mAs was used during the 40s scan. The collimation was 4 x 1mm, the table increment was 3mm/360° gantry rotation. Transverse sections with a nominal slice width of 1.25mm were reconstructed at 0.5mm intervals using a medium/sharp (B40) reconstruction kernel. A dataset of 512 x 512 x 998 voxels was reconstructed from a field of view of 476mm x 476mm x 499mm.

Preprocessing:

Due to low noise and good spatial resolution of the data set no further preprocessing and enhancement was necessary, except for resampling to a cubic grid and conversion to 8 bit voxels. This was, however, only necessary due to limitations of some rendering tools.

The resulting data were originally stored in DICOM format, which is the standard format in medical imaging. However, for scientific and experimental purposes more handy file formats are desirable. Therefore, the data set was converted (and is publicly available therein) to the .dat and f3d formats [XMT 2001; Šrámek and Dimitrov June 19–21, 2002]. The .dat format files are based on the unsigned short data type. The first three entries represent the data set dimensions followed by pairs of bytes representing one voxel. The f3d format is more general and stores all the necessary data attributes in an easy to read header, followed by a preview image and the compressed 3D data itself.

Segmentation of tomographic data sets traditionally is, depending on the goals, either very simple or very complicated. The simple task in our case was classification of the foreground voxels (the tree itself with decorations) with respect to the background. This task was accomplished easily by thresholding. The hard segmentation task was to separate various tissues of the tree (trunk and needles) and decorations. For this purpose we used two segmentations



Figure 2: A picture of the Christmas tree.

tools, ISEG [Šrámek 1993] and the segmentation functionality of JVision (a medical 3D workstation from TIANI MedGraph [Tiani MedGraph 2002]). ISEG is a general purpose interactive system for segmentation of 3D data sets based on the assumption of spatial object homogeneity. Such objects can be identified by thresholding. Several objects can be selected even if their density ranges overlap. Therefore, tools are provided (connected component labeling, morphological—erosion, dilation and smoothing—and logical—voxel-wise AND, OR, XOR—operations) to separate such objects. 15 different objects were labeled, some of them representing several instances of similar but spatially disconnected decorations (e.g., candles or balls). A similar functionality was available for segmentation using JVision. Separating objects with similar value ranges and close spatial locations is often difficult to handle with just threshold based and morphological methods. Therefore, a local water-shed method [Bruckschwaiger 2002] was applied to split and divide masks containing multiple objects.

4 Visualization algorithms

In the following the results of different volume visualization methods are presented.

Shaded Surface Display:

Figure 3 (left) shows polygon rendering using OpenGL hardware acceleration. The iso-surfaces at a value of -944 HU (Hounsfield Units) were extracted from the data set using an extended marching cubes algorithm. The internal structure of the decoration is represented with opaque surfaces.

Object labels and masks, which were the result of the segmentation step were further used for high quality rendering by means of ray tracing. Smooth object surfaces were obtained directly from the label volume by a first-order interpolation and thresholding [Šrámek 1994], while the normals, necessary for realistic surface shading, were estimated by central differences and trilinear interpolation directly from the original CT data (Figure 3, middle). The Chessboard distance ray traversal technique [Šrámek and Kaufman 2000] was used to speed up the rendering.

Direct Volume Rendering:

In Figure 3 (right) software raycasting is presented using a sharp transfer function showing an iso-surface at -954 HU.

Interactive direct volume rendering running at 5 to 10 frames per second, on a Pentium 4 based system using a GeForce4 Ti4600 graphics card is used in Figure 4 to the left. This approach is based on real-time decompression of a wavelet encoded multireso-

lution hierarchy and multiresolution volume rendering [Guthe and Strasser 2001]. The images are rendered using lossless compression at a ratio of about 3.9:1.

Figure 1 shows images of the Christmas tree rendered using the RTVR library [Mroz and Hauser 2001], at about 3-4 frames per second on a PIII/1.2GHz machine (full spatial resolution of the dataset, 512x512 image). RTVR allows to combine different compositing modes for different objects like surface rendering for the angels and summation (X-ray) for the remaining objects in image 5 of Figure 1. As RTVR is a pure Java solution the tree can be viewed interactively using an RTVR applet at this paper's web-page [XMT 2001].

Figure 4 (middle) shows non-photorealistic direct volume rendering using the "Bubble Model" [Csébfalvi and Gröller 2001]. Iso-surfaces are rendered as thin semi-transparent membranes similarly to blown soap bubbles. The approach is a fast previewing technique for volumetric data which does not require a time consuming transfer function specification to visualize internal structures. Originally developed for medical data the method also works for the scanned data set in quickly illustrating the most important features.

Arboroscopy:

Virtual endoscopy is used to inspect tubular objects of volumetric data sets. Applied to our data set, the term arboroscopy most illustratively describes this technique. A seven-fold branching is shown in Figure 4 (right). As branches of such high degree rarely exist in common endoscopic applications, this dataset provides an interesting worst-case test scenario.

Curved Planar Reformation:

Curved Planar Reformation is a visualization technique used to inspect vascular structures [Kanitsar et al. 2001]. The re-sampled plane in Figure 5 is generated from the central axis of a branch of the tree. Thus the stability and correctness of the CPR algorithm could be investigated exemplarily on this special data set.

5 Conclusions

We have presented a straightforward technique for modeling of complex shapes by means of tomographic scanning. The limits of its applicability are given by the scanner properties, which define the outer and inner scale of the representable object: one can scan objects with dimensions up to about 500 mm with small details at about 1 mm or even less. Some materials (i.e., metal) cause artifacts and therefore should be, if possible, avoided. Color information is lost during the scan process. Up to now CT modalities are expensive and restricted in accessibility.

On the other hand this model acquisition method provides important properties. The data acquisition is independent from the object complexity and both surfaces and object interiors are represented. Different types of material are distinguishable according to the material dependent attenuation. Computed Tomography produces high resolution data sets. Even small features, as the needles of the presented data set, are still properly sampled.

Finally, a contribution of this work is to provide the visualization community with a high resolution data set with some interesting properties. It includes rather large and smooth objects like the figure on top of the tree as well as a lot of fine detail like the needles. It is usable as a test data set for several applications which we showed by applying various visualization algorithms. The Christmas tree data set is publicly available from our web site [XMT 2001].

6 Acknowledgements

The work presented in this publication has been partly funded by: AngioVis - Visualization Tools for Peripheral CT-Angiography project (FWF-P15217-INF), supported by the Fonds zur Förderung

der wissenschaftlichen Forschung, Austria; ADAPT project (FFF-804544), supported by *Tiani Medgraph* and the *Forschungsförderungsfonds für die gewerbliche Wirtschaft*, Austria; the VRVis research center, Vienna supported by the K plus Programm.

Special thanks to Martin Kampel and Robert Sablatnig from the Pattern Recognition and Image Processing Group, Vienna University of Technology, for laser range scanning the Christmas tree (and telling us in advance it would not work).

References

- BRUCKSCHWAIGER, M. 2002. *Evaluation of Binary Segmentation Techniques Regarding their Usability in Medical Volume Visualization*. Master's thesis, Vienna University of Technology.
- CSÉBFALVI, B., AND GRÖLLER, E. 2001. Interactive volume rendering based on a "bubble model". In *GI 2001*, 209–216.
- GUTHE, S., AND STRASSER, W. 2001. Real-time decompression and visualization of animated volume data. In *IEEE Visualization 2001*, ACM, 349–356.
- HABERMEHL, A., AND RIDDER, H.-W. 1994. Applications of computerized tomography in forest and tree sciences. In *International Symposium on Computerized Tomography for Industrial Applications*.
- KANITSAR, A., WEGENKITTL, R., FELKEL, P., FLEISCHMANN, D., SANDNER, D., AND GRÖLLER, E. 2001. Computed Tomography Angiography: A Case Study of Peripheral Vessel Investigation. In *IEEE Visualization 2001*, ACM, 477–480.
- LEVOY, M., PULLI, K., CURLESS, B., RUSINKIEWICZ, S., KOLLER, D., PEREIRA, L., GINZTON, M., ANDERSON, S., DAVIS, J., GINSBERG, J., SHADE, J., AND FULK, D. 2000. The digital Michelangelo project: 3D scanning of large statues. In *Siggraph 2000, Computer Graphics Proceedings*, ACM, 131–144.
- MROZ, L., AND HAUSER, H. 2001. RTVR – a flexible Java library for interactive volume rendering. In *IEEE Visualization 2001*, ACM, 279–286.
- PERRY, R. N., AND FRISKEN, S. F. 2001. Kizamu: A system for sculpting digital images. In *Siggraph 2001, Computer Graphics Proceedings*, ACM Press / ACM SIGGRAPH / Addison Wesley Longman, E. Fiume, Ed., Annual Conference Series, 47–56.
- ŠRÁMEK, M., AND DIMITROV, L. I. June 19–21, 2002. *f3d* — a file format and tools for storage and manipulation of volumetric data sets. In *1st International Symposium on 3D Data Processing, Visualization and Transmission*. to be published.
- ŠRÁMEK, M., AND KAUFMAN, A. 2000. Fast ray-tracing of rectilinear volume data using distance transforms. *Transactions on Visualization and Computer Graphics* 6, 3, 236–252.
- ŠRÁMEK, M. 1993. Interactive segmentation of tissues for medical imaging. In *Czech Pattern Recognition Workshop '93*, V. Hlaváč and T. Pajdla, Eds., 164–171.
- ŠRÁMEK, M. 1994. Fast surface rendering from raster data by voxel traversal using chessboard distance. In *IEEE Visualization '94*, ACM, 188–195.
- TIANI MEDGRAPH, 2002. JVision/Spacevision diagnostic workstation. <http://www.tiani.com/>.
- XMT, 2001. Christmas Tree Web Page. <http://ringlotte.cg.tuwien.ac.at/datasets/XMasTree/XMasTree.html>.



Figure 3: From left to right: OpenGL polygon rendering based on marching cubes surface extraction. Ray tracing of the segmented tree. Direct volume rendering: ray casting.

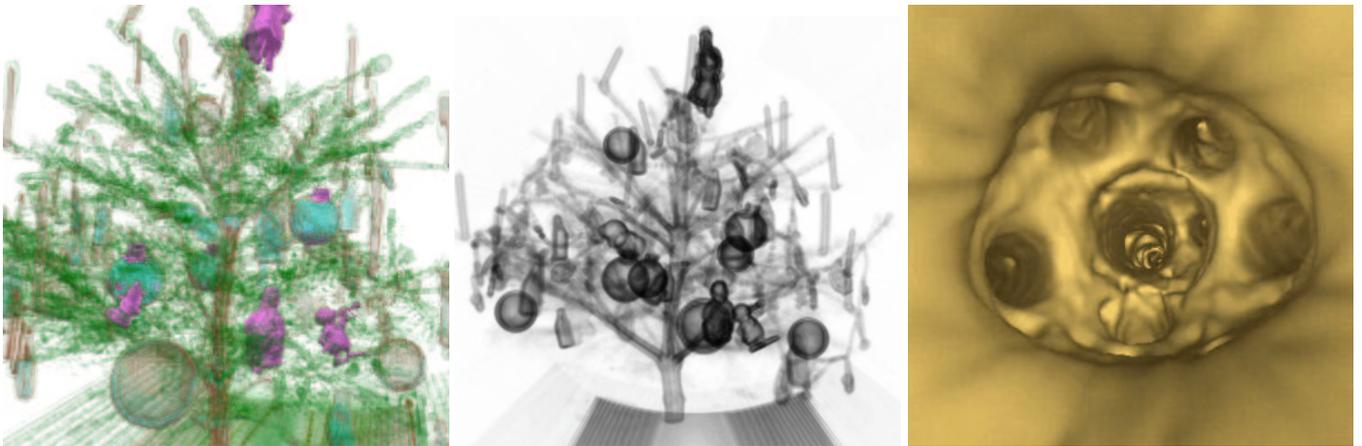


Figure 4: From left to right: Interactive wavelet encoded multiresolution volume rendering. Non-photorealistic rendering using the "Bubble Model". View of a seven-fold branch in a virtual arboroscopy.



Figure 5: A Curved Planar Reformation of the XMas-Tree dataset.